



**Installation Guide:
Radio Frequency (RF) and Microwave Radiation
Shielding Travel Bed Canopy**



Safe Living Technologies Inc.

70 Watson Parkway South, Unit 6
Guelph, ON, N1L 0C3,
Canada

Phone: (888) 814-2425

Email: support@safelivingtechnologies.com

www.SafeLivingTechnologies.com

Jan. 2021

Installation Guideline:

Please read the installation guidelines completely before installing the canopy. Please be aware the Travel Bed Canopy cannot be installed in all situations; this guideline is intended for the installation using a screw hook with drywall construction. The canopy can be hung from any solid mounting point if already present. (ie ceiling fan, light fixture, etc)

It is strongly recommended that this canopy be used for only traveling purposes. If the user is looking for a permanent solution, it is best to use our box style canopy.

For optimal results, it is recommended to have a complete Electromagnetic Field Assessment conducted by one of our EMF consultants or assess the fields yourself relative to the building biology institute guidelines for sleeping areas prior to installing this canopy. It is imperative to install the canopy in a low AC electric field environment, slightly away from the wall and away from live electrical outlets. The canopy is not externally conductive and cannot be grounded. Avoid direct contact with the fabric when in use and avoid use of electrical or electronic devices inside or around the canopy. For more information contact us or one of our local distributors.

People required for installation

- One or more person will be required to install this canopy.

Tools Required

- Drill - Drill Bit(s)
- Stud Finder – Not in all cases but depends on ceiling

Parts Required – Parts not included can be found at your local hardware store



Collapsible hoop – included with Bed Canopy



1x Screw hook



1x Drywall Anchor



String – may be required to adjust height of canopy

Installation Steps

1. Assemble collapsible hoop and leave one end detached.
2. Feed hoop through sleeve at the top inside of the canopy, then finish connecting hoop together.
3. Mark hole on ceiling centered to the center of the bed.
4. Drill appropriate size hole where marked on the ceiling for the drywall anchor.
5. Insert drywall anchor into drilled hole then screw in the screw hook into drywall anchor.
6. The fabric loop sewn at the top of the canopy can be used to hang from the screw hook. Be sure screw hook is secure before hanging.
7. Ensure all sides of the canopy are in contact with the floor, especially if using a floor sheet. If the canopy does not meet the floor properly, adjust height with length of string.



Users Guidelines & Care Instructions for Swiss Shield®


Thank you for purchasing our Swiss Shield® EMC fabrics. We hope it will provide you with years of satisfying use. For optimal results and product longevity, please read this document in full before you attempt installation. For more information or if you have any further questions please contact your authorized support representative for assistance.

- Swiss Shield® fabric is designed to reduce Radio Frequency exposure on the principle of reflection. The fabrics are available in 2 formats non-conductive and conductive and there are several models of each format. Regardless of format or model, each fabric contains a patented arrangement of wire mesh, interwoven tiny silver coated copper threads that are sealed to the touch and to the elements. All Swiss Shield® fabrics can be washed without shielding loss unlike most other brands.



Swiss Shield® Thread

- Surface Conductive or Surface Insulated Thread
- Base Material (Cotton or Synthetic)



Surface Insulated


New Daylite
Naturell
Wear
Ultima

Surface Conductive

Evo Ultra
Naturell Ultra
Condex – Not available

- When Swiss Shield® fabric is installed, its location, quantity and proper installation should be determined by a trained EMF specialist or consultant. If a specialist or consultant is not available in your area then appropriate measuring equipment should be acquired by the user. Please review our EMF Meter, RF Meter and Body Voltage Kit product pages for details.
- In order to ensure optimum results, the installer/user should assess the living space for Radio Frequency “RF” Radiation and AC Electric Fields. Before and after measurements are important to determine the overall effectiveness and impact of the shield. **Important:** We recommend that larger pieces of fabric and canopies of non-conductive fabrics should be installed in a low AC Electric Field environment (<1 V/m or <100 mV of body voltage). Usually the shutting off of circuit breakers or the installation of a Remote Cutoff Switch is required.
- In addition to blocking RF, grounding the conductive fabric can aid in the reduction of AC electric fields. In the event that a ground is applied to the Swiss Shield® fabric, please consult with your local licensed electrician and comply with local electrical codes. Note: Swiss Shield® will reflect radio waves whether grounded or not. The Swiss Shield® non-conductive fabrics are not externally conductive and grounding is not recommended. Before and after measurements are important to determine the overall effectiveness and impact of the shield.
- Avoid the use of electronic or electrical devices near the fabric or under a canopy
- Swiss Shield® fabric is not fire retardant. Use with caution and at your own risk
- Swiss Shield® fabric is intended exclusively for indoor use in dry areas
- Swiss Shield® fabrics have the Oeko-Tex 100 certification meaning they are the highest quality and most Eco friendly shielding fabric available. As with all new textile fabric, a “new material” scent may exist. The impact of this scent varies from person to person. Washing the material before installation will eliminate the scent.

Sewing - Use regular thread and a felled seam to join pieces

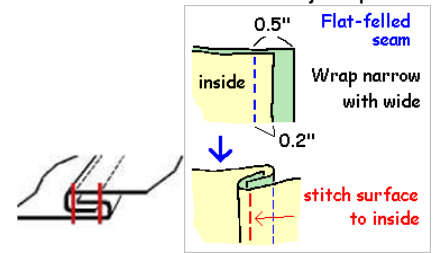

Washing: Use a Mild Liquid Detergent



TESTEX AG, SWISS TEXTILE TESTING INSTITUTE
GOTTHARDSTRASSE 61
POSTFACH 2156
8002 ZÜRICH, SWITZERLAND

CERTIFICATE

The company

SPOERRY 1866 AG
Bergstrasse 25
CH - 8890 Flums



is granted authorisation according to STANDARD 100 by OEKO-TEX® to use the STANDARD 100 by OEKO-TEX® mark, based on our test report ZH005 132822.1

for the following articles:

Swiss Shield Yarn; textile filament Brass/Silver TWF-D, Copper/Silver textile filament TWF-F (Polyamidimid), braided with polyester or cotton yarns;
Covered raw yarn made of polyamide/elastane (based on material pre-certified according to STANDARD 100 by OEKO-TEX®)

The results of the inspection made according to STANDARD 100 by OEKO-TEX®, Appendix 4, product class I have shown that the above mentioned goods meet the human-ecological requirements of the STANDARD 100 by OEKO-TEX® presently established in Appendix 4 for baby articles.

The certified articles fulfil requirements of Annex XVII of REACH (incl. the use of azo colourants, nickel release, etc.) as well as the American requirement regarding total content of lead in children's articles (CPSIA; with the exception of accessories made from glass).

The holder of the certificate, who has issued a conformity declaration according to ISO 17050-1, is under an obligation to use the STANDARD 100 by OEKO-TEX® mark only in conjunction with products that conform with the sample initially tested. The conformity is verified by audits.

The certificate ZHYO 070054 is valid until 15.07.2018

Zurich, 12.09.2017

Serge Rolle
Serge Rolle
CEO | TESTEX AG

M. Egloff
Mary Rose Egloff
Ecology Team Leader | TESTEX AG

